

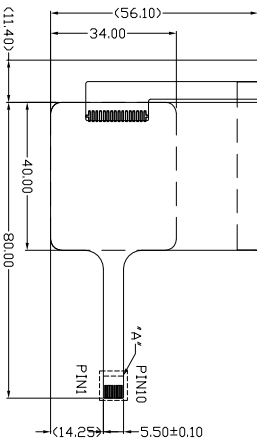


| REV I |  | DESCRIPTION I                   | BY        | DATE       |
|-------|--|---------------------------------|-----------|------------|
| A     |  | RELEASED < BASED ON VERSION RTD | Ruby Long | 2013/11/08 |
| B     |  | REV. FACE PLATE OUTLINE         | Ruby Long | 2014/02/17 |

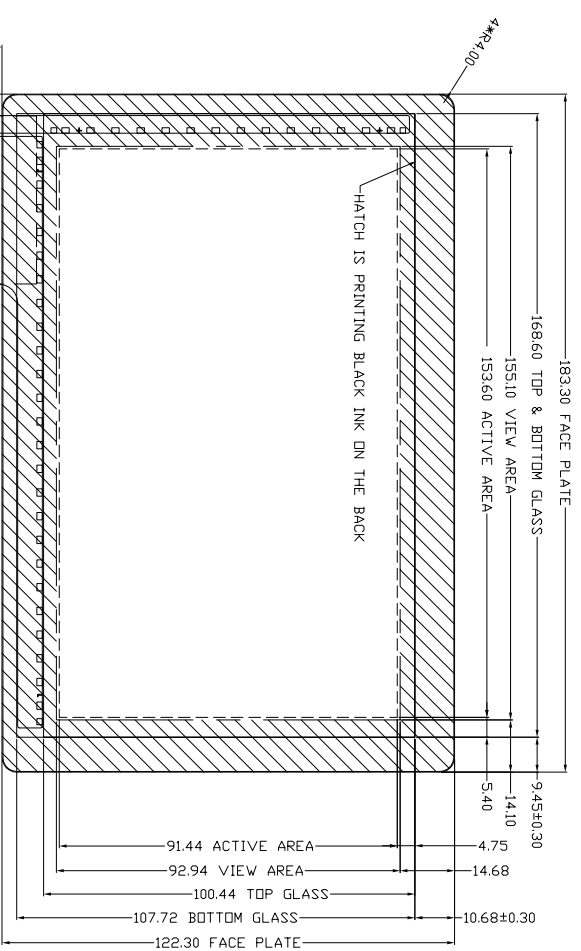

STEEL STIFFENER

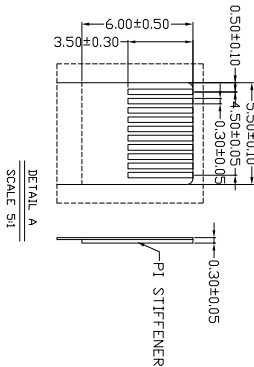

| PIN# | 12C       |
|------|-----------|
| 1    | SDA       |
| 2    | /RESET    |
| 3    | /CHG      |
| 4    | NC        |
| 5    | GND       |
| 6    | VDD(3.3V) |
| 7    | NC        |
| 8    | NC        |
| 9    | NC        |
| 10   | NC        |

12C PIN TABLE

NOTES:

1. ALL DIMENSIONS IN MM.
2. OPERATING TEMPERATURE: -20°C TO 80°C
3. STORAGE TEMPERATURE: -30°C TO 80°C
4. FPC BENDING RADIUS IS 10MM MIN
5. ALL MATERIALS MUST BE ROHS COMPLIANT
6. FACE PLATE: SDA-LINE GLASS, NO SHARP CORNERS OR EDGES.
7. (\*) DIMENSION FOR REFERENCE
8. THE COMPATIBLE MOLEX FPC CONNECTOR IS 52745-1097 OR EQUIVALENT

A

B

C

D

8

7

6

5

4

3

2

1

A

B

C

D