

D

C

B



A

D

C

B

A

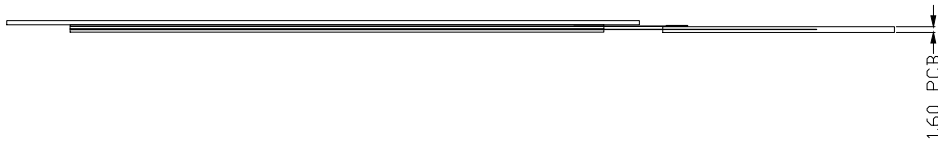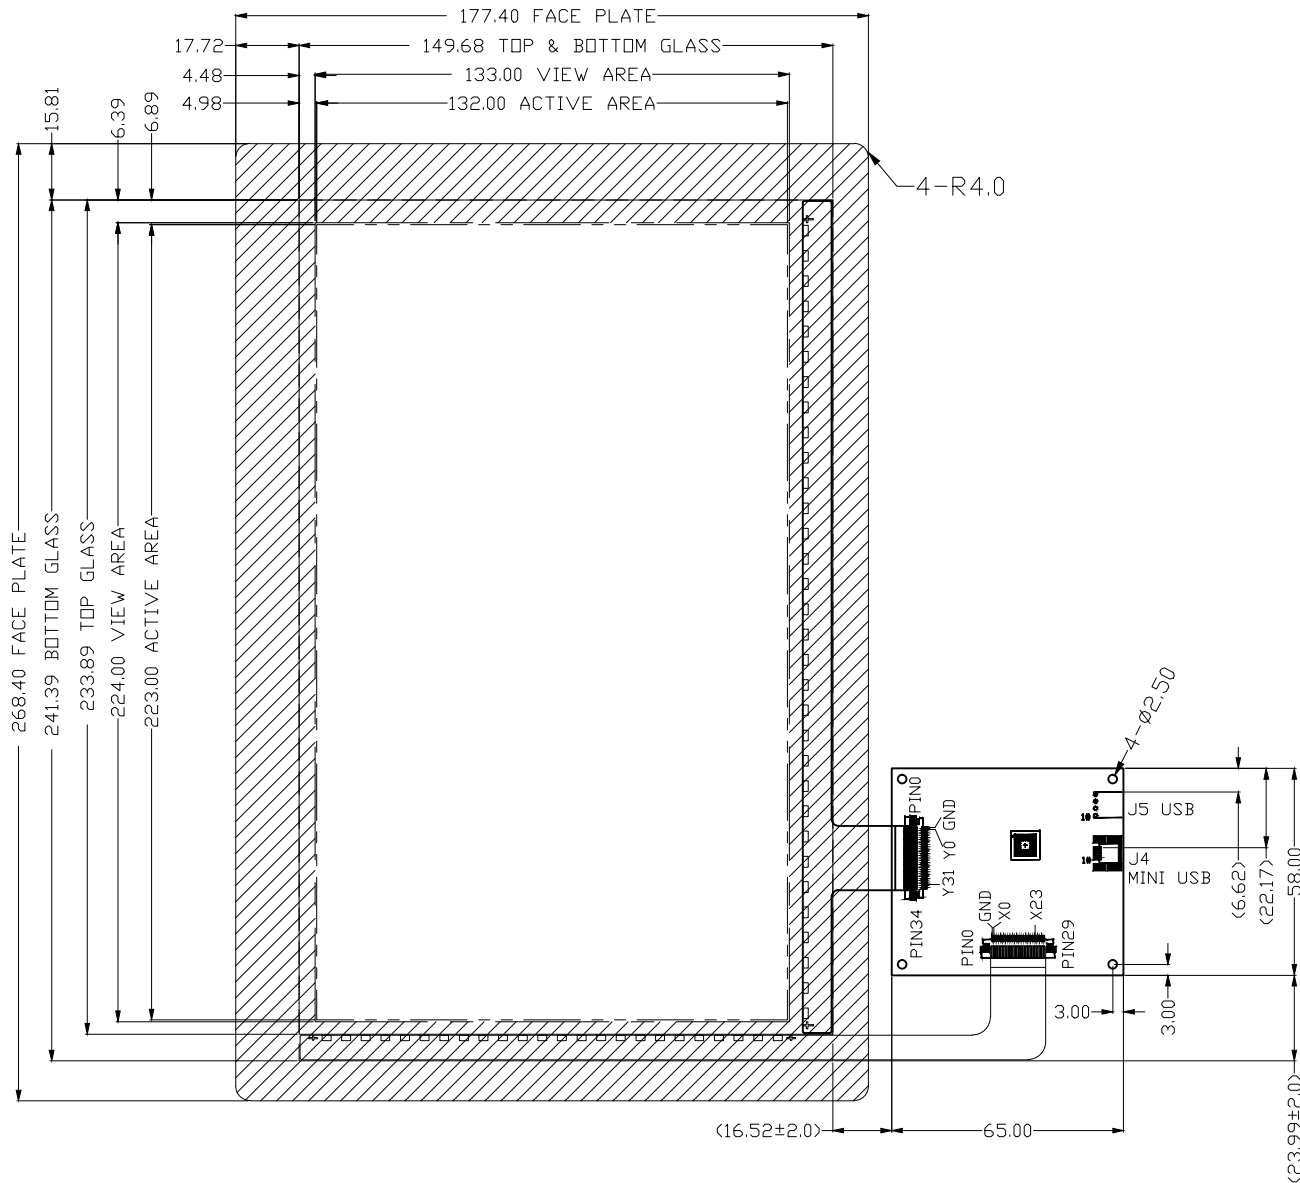


NOTES:

1. ALL UNITS IS MM.
2. OPERATING TEMPERATURE: -30°C TO 70°C
3. STORAGE TEMPERATURE: -30°C TO 80°C
4. FPC BENDING RADIUS IS R1.0MM MIN
5. USB CONNECTOR IS MOLEX 53015-0410 OR EQUIVALENT
6. ALL ROHS ASSEMBLY
7. FACE PLATE: SODA-LIME GLASS, NO SHARP CORNERS OR EDGES.

- 3.20±0.50
- 1.10 FACE PLATE
- 0.50 UV GLUE
- 0.70 TOP GLASS (ITO FACE UP)
- 0.20 OCA
- 0.70 BOTTOM GLASS (ITO FACE UP)

BACK VIEW OF FACE PLATE

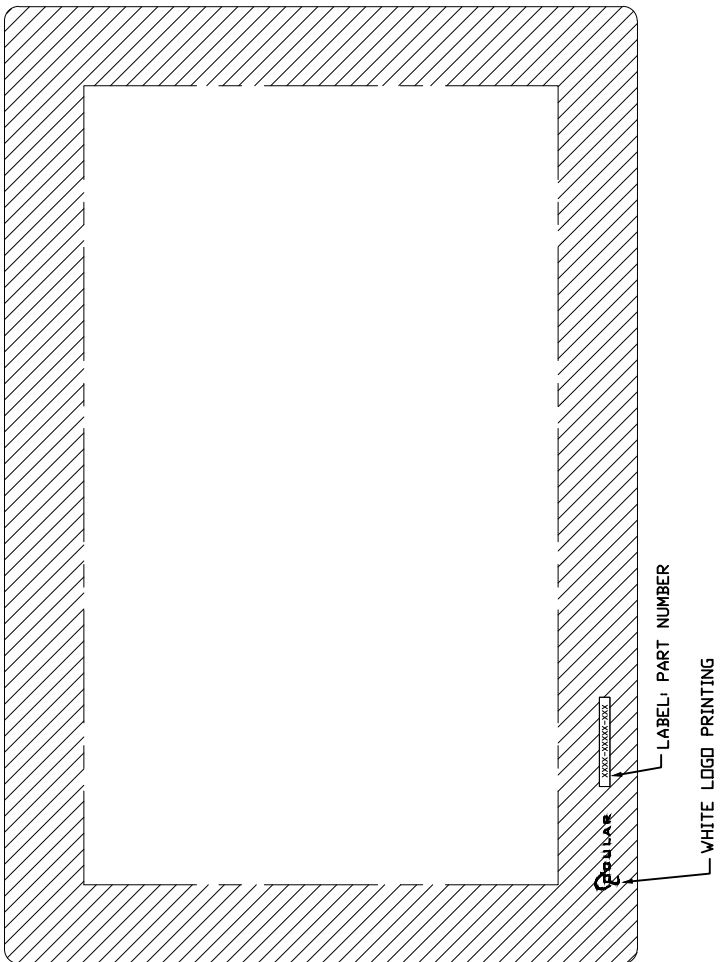

J5 (USB) PIN TABLE

PIN#	J5 (USB)
1	5.0V
2	D-
3	D+
4	GND



THIS DOCUMENT IS CONFIDENTIAL PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF OCULAR CORPORATION.

UNLESS OTHERWISE NOTED :

UNITS	DECIMAL
INCHES [mm]	.XXX[.XX] ±0.008[0.20]
ANGLES	±0.5°
THIRD ANGLE PROJECTION	

ENGR MANAGER:		DATE :	
CHECKED BY:		DATE :	
DWN BY: RUBY		DATE : 2012/07/26	
DRAWING TITLE : 10.1" FACEPLATE, mxT768E,USB			
DRAWING No. : F101-0768E-099			REV: B
SCALE 1 : 1		SHEET: 1 OF 1	