

D

C

B

A

8

7

6

5

4

3

2

1

D

C

B

A

8

7

6

5


4

3

2

1


REV :	DESCRIPTION:	BY	DATE
A	RELEASE	RUBY	2012/03/29
B	CANCEL CHEMICALLY STRENGTHEN	RUBY	2012/07/26

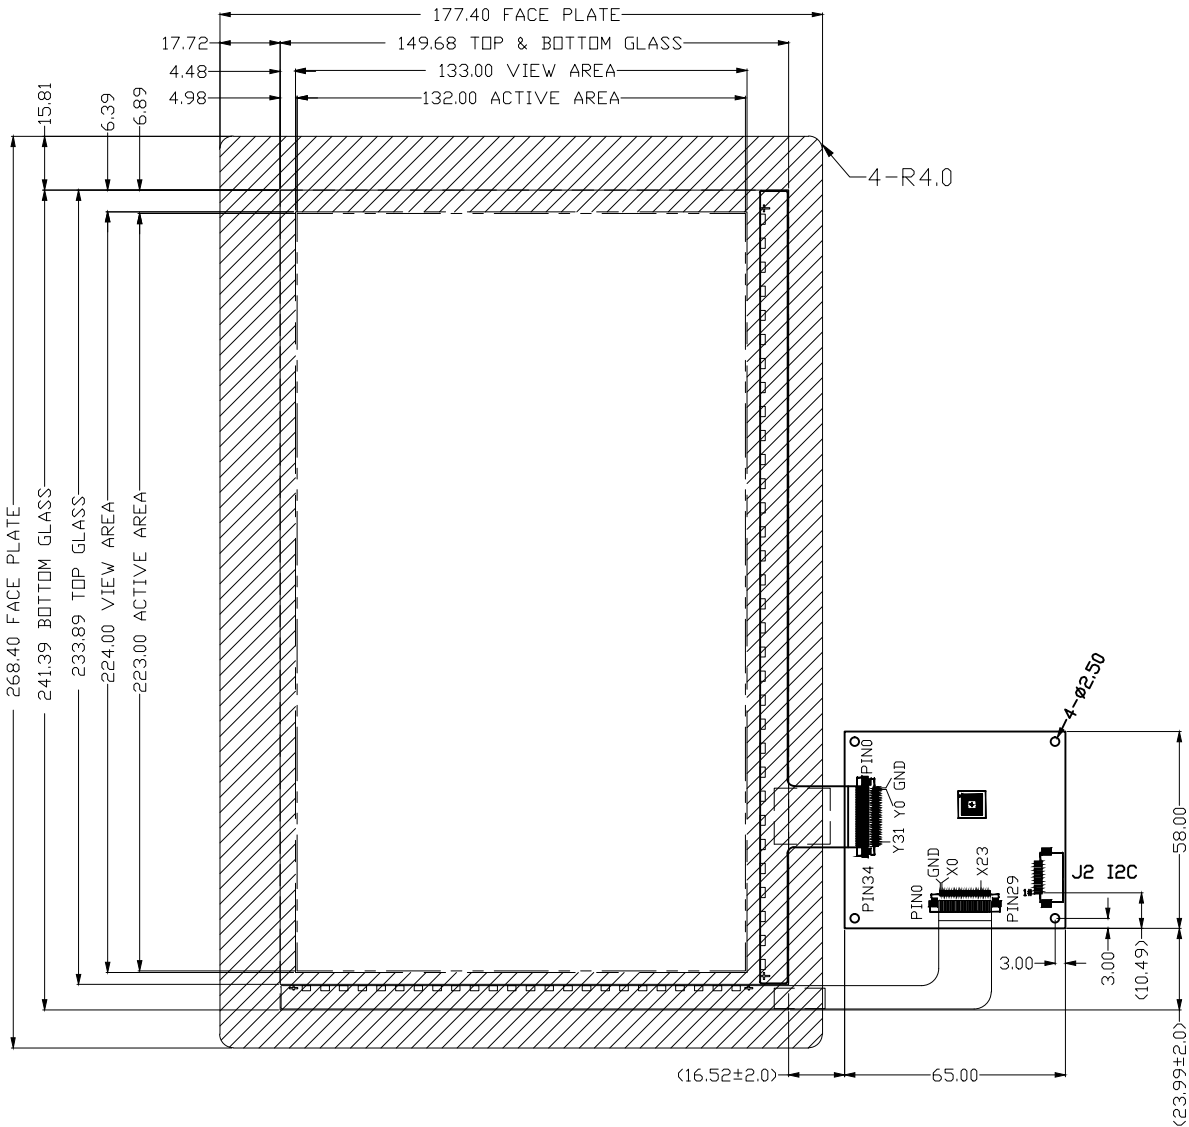

- NOTES:
1. ALL UNITS IS MM.
 2. OPERATING TEMPERATURE: -30°C TO 70°C
 3. STORAGE TEMPERATURE: -30°C TO 80°C
 4. FPC BENDING RADIUS IS R1.0MM MIN
 5. I2C CONNECTOR IS MOLEX 52207-1060 OR EQUIVALENT
 6. ALL ROHS ASSEMBLY
 7. FACE PLATE: SODA-LIME GLASS, NO SHARP CORNERS OR EDGES.

- 3.20±0.50
- 1.10 FACE PLATE
- 0.50 UV GLUE
- 0.70 TOP GLASS (ITO FACE UP)
- 0.20 DCA
- 0.70 BOTTOM GLASS (ITO FACE UP)

BACK VIEW OF FACE PLATE

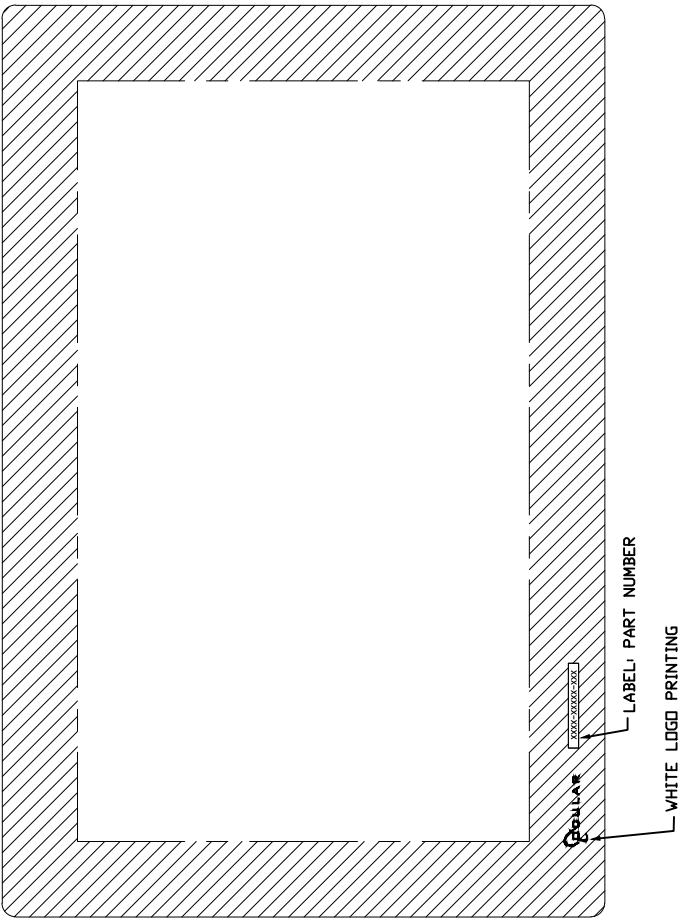


J2 (I2C) PIN TABLE

PIN#	J2 (I2C)
1	SCL
2	SDA
3	/RESET
4	/CHG
5	NC
6	GND
7	VDD (3.3V)
8	NC
9	NC
10	NC



THIS DOCUMENT IS CONFIDENTIAL PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF OCULAR CORPORATION.

UNLESS OTHERWISE NOTED :		ENGR MANAGER:		DATE :	
		CHECKED BY:		DATE :	
UNITS	DECIMAL	DWN BY: RUBY		DATE : 2012/07/26	
INCHES [mm]	.XXX[.XX] ±0.008[0.20]	DRAWING TITLE : 10.1" FACEPLATE, mxT768E,I2C			
ANGLES	±0.5°	DRAWING No. : F101-0768E-199			REV: B
THIRD ANGLE PROJECTION 		SCALE 1 : 1		SHEET: 1 OF 1	