
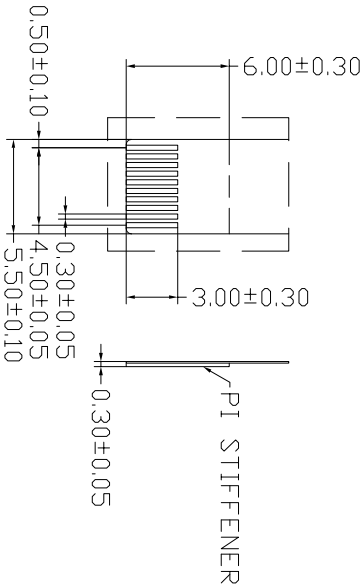
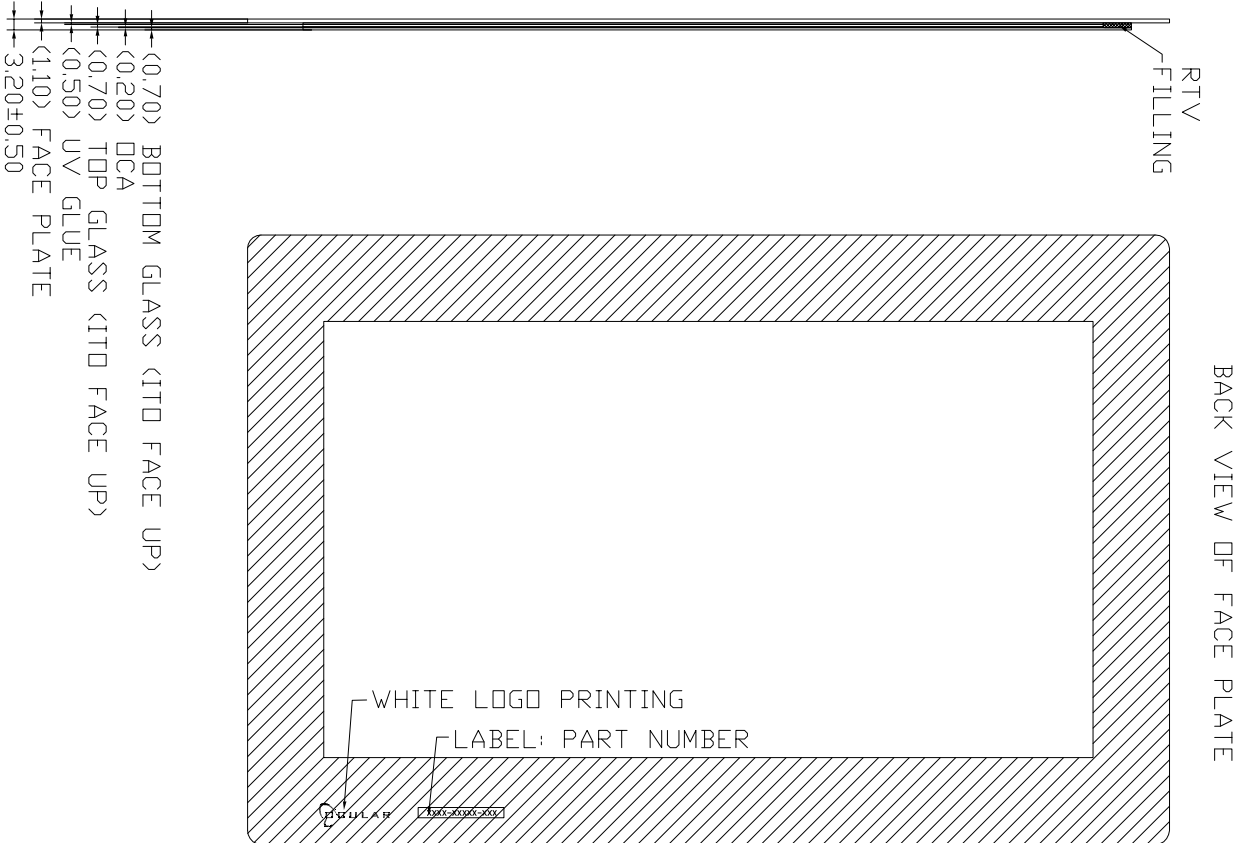


REV :	DESCRIPTION :	BY	DATE
A	RELEASED (BASE ON VERSION RT3)	Neil Zeng	2013/11/20

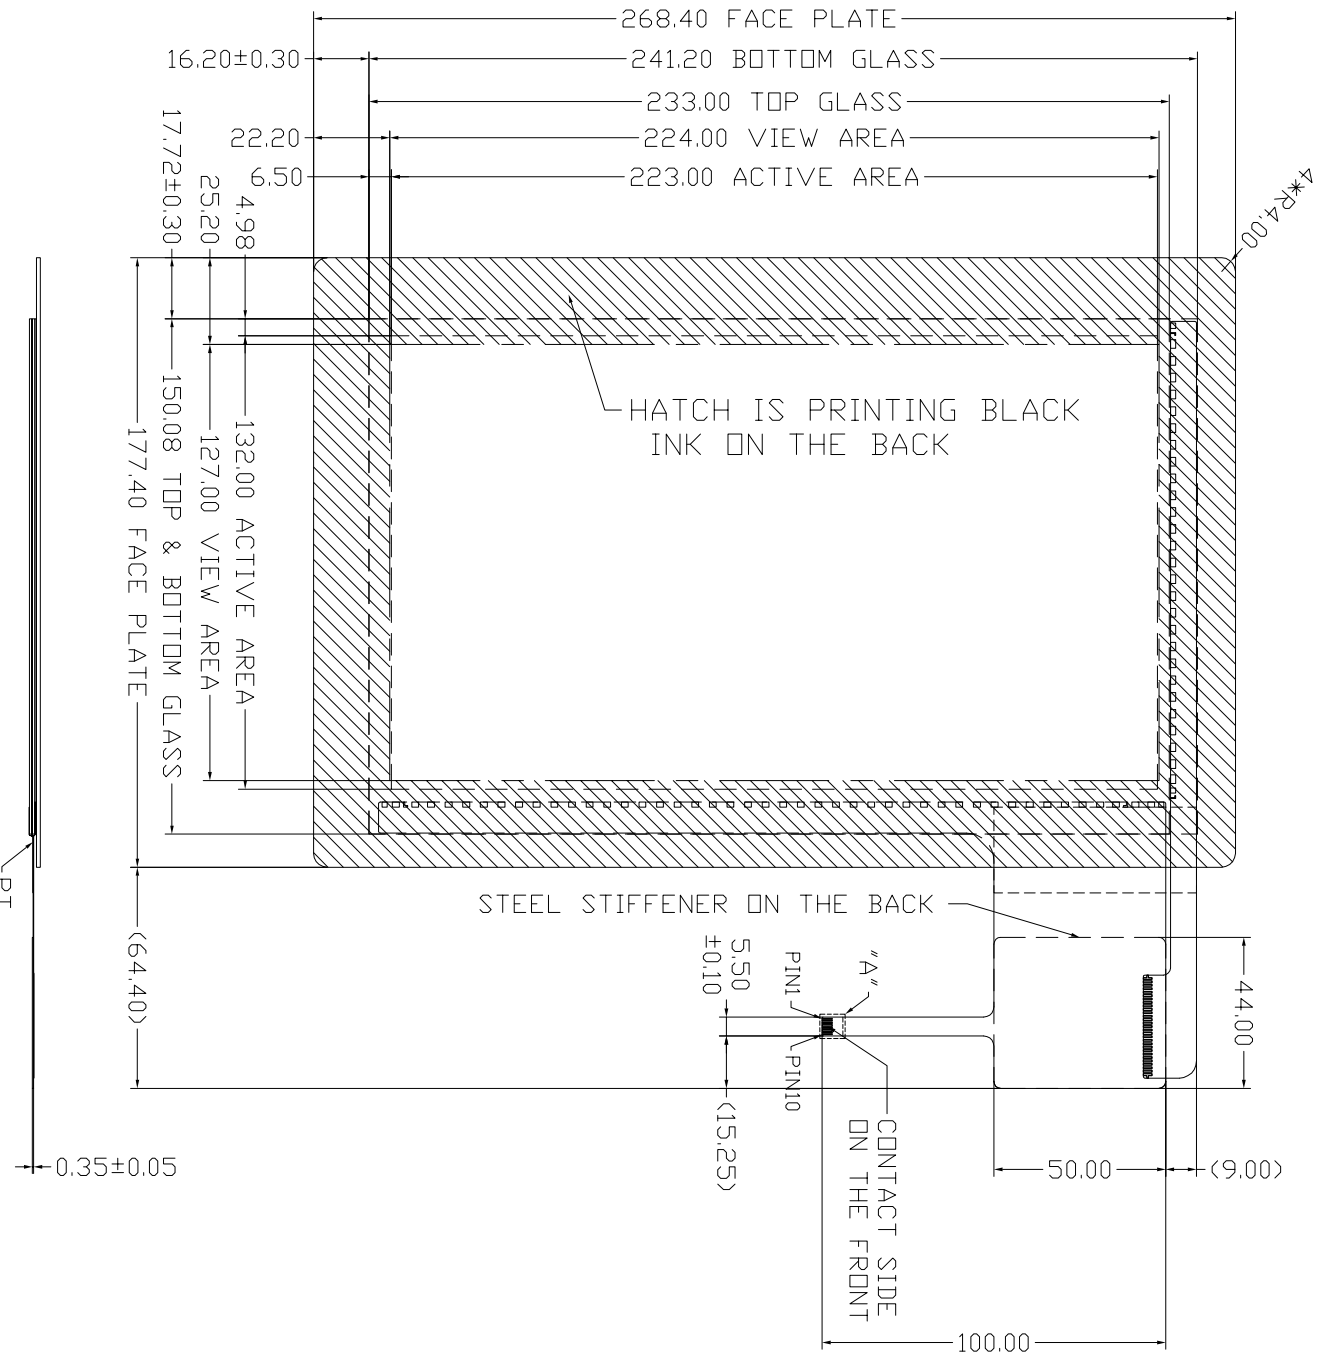

PIN TABLE

PIN#	(12C)
1	SCL
2	SDA
3	/RESET
4	/CHG
5	NC
6	GND
7	VDD (3.3V)
8	NC
9	NC
10	NC

NOTES:

1. ALL DIMENSIONS IN MM.
2. OPERATING TEMPERATURE: -20°C TO 80°C
3. STORAGE TEMPERATURE: -30°C TO 80°C
4. FPC BENDING RADIUS IS R1.0MM MIN
5. ALL MATERIALS MUST BE ROHS COMPLIANT
6. FACE PLATE: SODA-LIME GLASS, NO SHARP CORNERS OR EDGES.
7. (*) DIMENSION FOR REFERENCE
8. THE COMPATIBLE MOLEX FPC CONNECTOR IS 52745-1097 OR EQUIVALENT

 DISPLAY YOUR ADVANTAGE		UNLESS OTHERWISE NOTED :		ENGR. MANAGER :		DATE :	
UNITS	DECIMAL	CHECKED BY :	Jacky Li	DATE :	2013/11/20		
INCHES [mm]	:XXX(.XX) ±0.008(0.201)	D/WN BY :	Neil Zeng	DATE :	2013/11/20		
ANGLES	±0.5°	DRAWING TITLE :	F101-1188S-195 FP+TP			REV :	A
THIRD ANGLE PROJECTION		DRAWING No. :	F101-1188S-195				
		SCALE	1 : 1			SHEET :	1 OF 1

THIS DOCUMENT IS CONFIDENTIAL. PROPRIETARY INFORMATION OF DOCLAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FORNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF DOCLAR CORPORATION.