REV :	DESCRIPTION:	BY	DATE
A	RELEASE	RUBY	2012/03/16
B	CANCEL CHEMICALLY STRENGTHEN	RUBY	2012/07/26

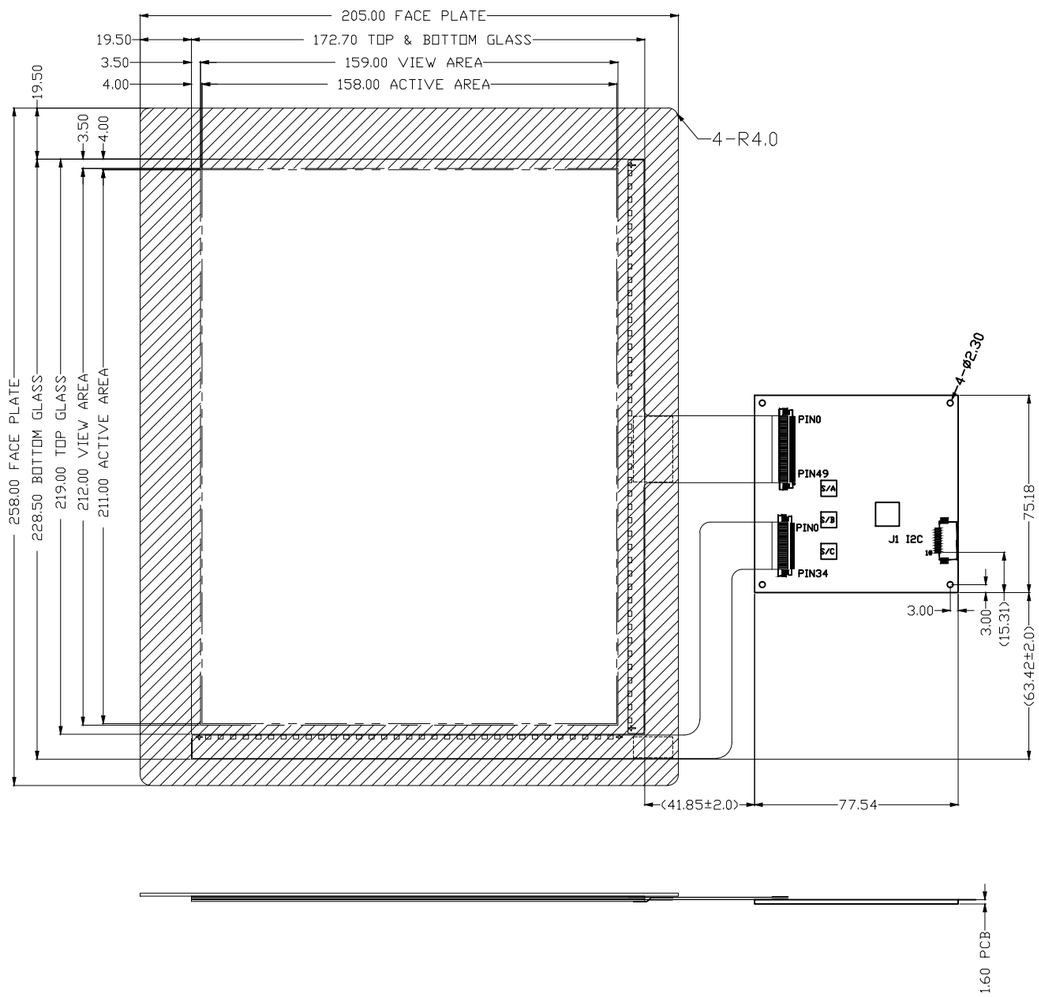

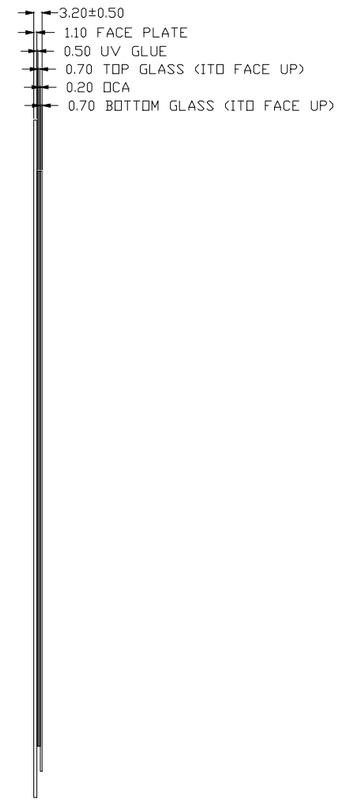

BACK VIEW OF FACE PLATE

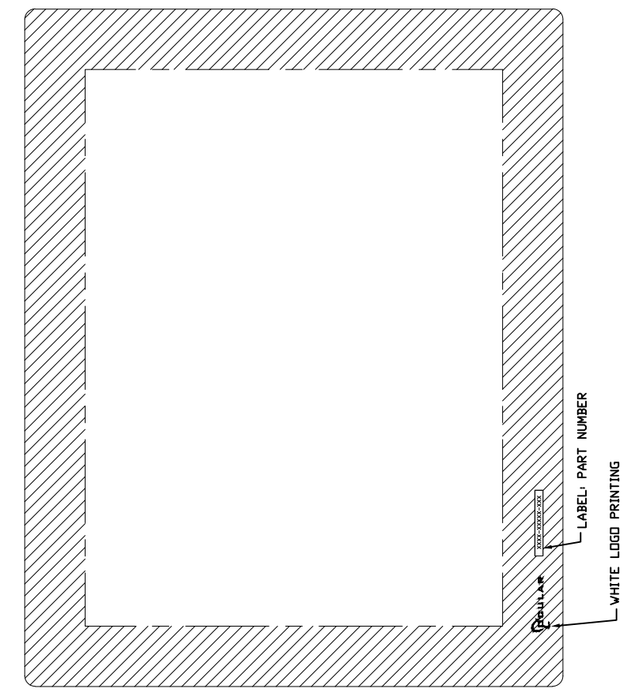

J1 (I2C) PIN TABLE

PIN#	J1 (I2C)
1	SCL
2	SDA
3	/RESET
4	/CHG
5	NC
6	GND
7	VDD (3.3V)
8	NC
9	NC
10	NC

NOTES:
1. ALL UNITS IS MM.
2. OPERATING TEMPERATURE: -30°C TO 70°C
3. STORAGE TEMPERATURE: -30°C TO 80°C
4. FPC BENDING RADIUS IS R1.0MM MIN
5. I2C CONNECTOR IS MOLEX 52207-1060 OR EQUIVALENT
6. ALL ROHS ASSEMBLY
7. FACE PLATE: SODA-LIME GLASS, NO SHARP CORNERS OR EDGES.

OCULAR.
DISPLAY YOUR ADVANTAGE

THIS DOCUMENT IS CONFIDENTIAL PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF OCULAR CORPORATION.

UNLESS OTHERWISE NOTED :	
UNITS	DECIMAL
INCHES [mm]	.XXX[.XX] ±0.008[0.20]
ANGLES	±0.5°
THIRD ANGLE PROJECTION	

ENGR MANAGER:	DATE :
CHECKED BY:	DATE :
DWN BY: RUBY	DATE : 2012/07/26
DRAWING TITLE : 10.4" FACEPLATE, mxT1386,I2C	
DRAWING No. : F104-01386-199	REV: B
SCALE 1 : 1	SHEET: 1 OF 1