



REV :	DESCRIPTION :	BY	DATE
A	RELEASED (BASE ON VERSION RT2)	Neil Zeng	2014/02/10

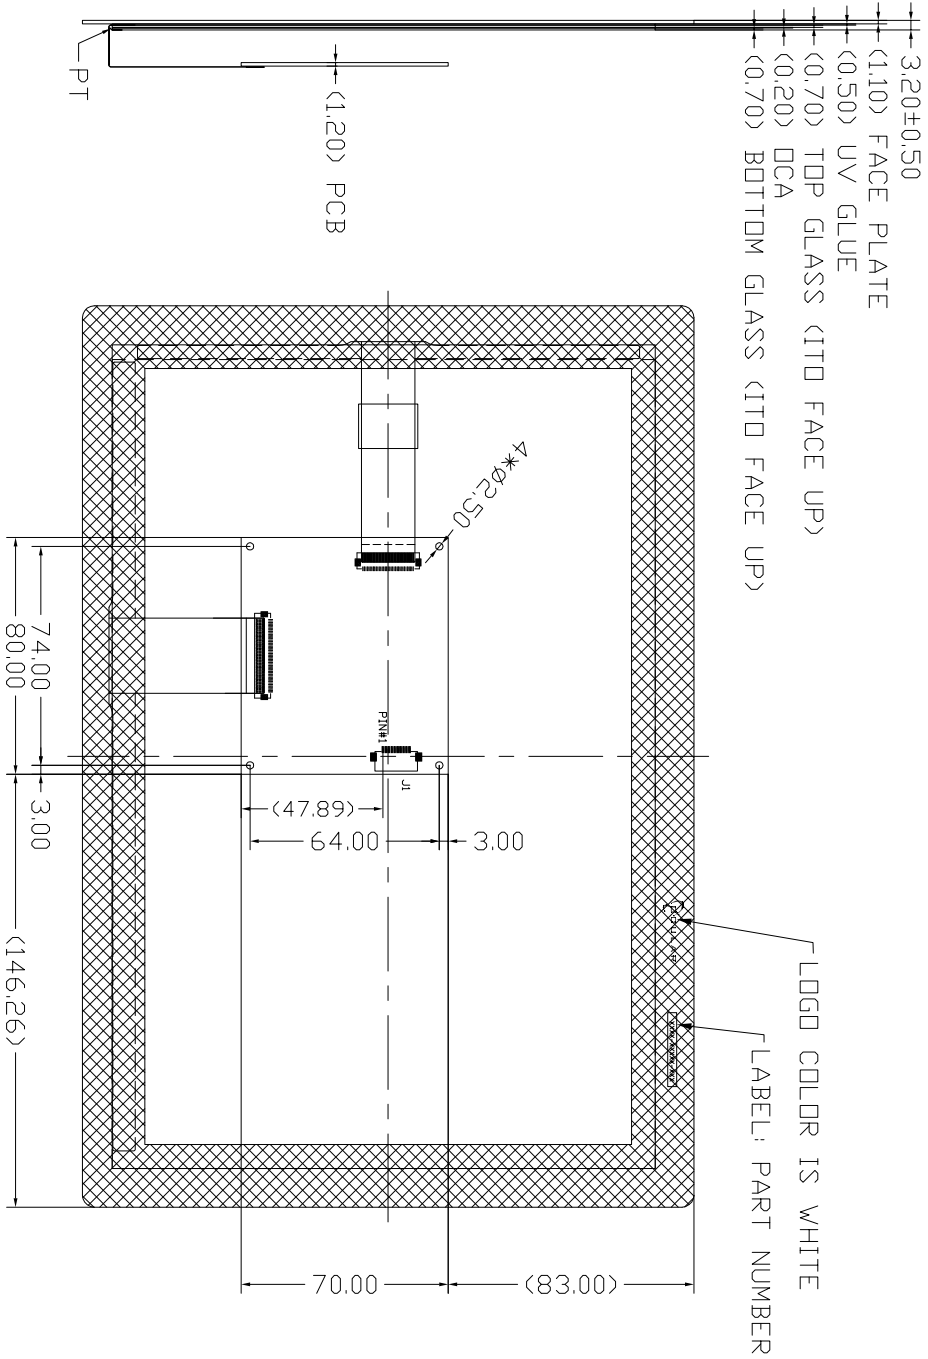

J1(I2C) PIN TABLE

PIN#	J1 (I2C)
1	SCL
2	SDA
3	/RESET
4	/CHG
5	NC
6	GND
7	VDD(3.3V)
8	NC
9	NC
10	NC

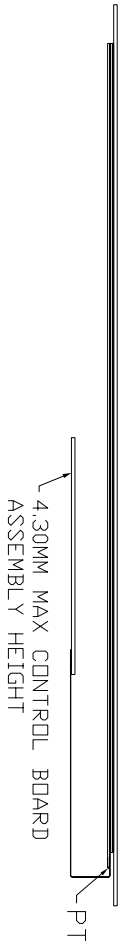

- NOTES:
1. ALL DIMENSIONS IN MM.
 2. OPERATING TEMPERATURE: -20°C TO 80°C
 3. STORAGE TEMPERATURE: -30°C TO 80°C
 4. FPC BENDING RADIUS IS R1.0MM MIN
 5. I2C CONNECTOR IS MDLX 52207-1060 OR EQUIVALENT
 6. ALL MATERIALS MUST BE ROHS COMPLIANT
 7. FACE PLATE: SODA-LIME GLASS, NO SHARP CORNERS OR EDGES.
 8. (*) FOR REFERENCE

 OCULAR® DISPLAY YOUR ADVANTAGE			
UNLESS OTHERWISE NOTED :		ENGR MANAGER :	
UNITS	DECIMAL	CHECKED BY :	DATE :
INCHES [mm]	XXXLXX] ±0.008(0.20]	Jacky Li	2014/02/10
ANGLES	±0.5°	DWN BY :	DATE :
		Neil Zeng	2014/02/10
THIRD ANGLE PROJECTION 		DRAWING TITLE : F121-1188S-199	
DRAWING No. : F121-1188S-199		REV : A	
SCALE 1 : 1	SHEET : 1		OF 1
THIS DOCUMENT IS CONFIDENTIAL PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF OCULAR CORPORATION.			



THIS DOCUMENT IS CONFIDENTIAL. PROPRIETARY INFORMATION OF DOCLAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FORNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF DOCLAR CORPORATION.