


REV :	DESCRIPTION:	BY	DATE
A	RELEASED	NEIL	2012/03/14
B	CANCEL FACE PLATE CHEMISTRY STRENGTHENING	NEIL	2012/07/26

- 3.20±0.50
- 1.10 FACE PLATE
- 0.50 UV GLUE
- 0.70 TOP GLASS (ITO FACE UP)
- 0.20 DCA
- 0.70 BOTTOM GLASS (ITO FACE UP)

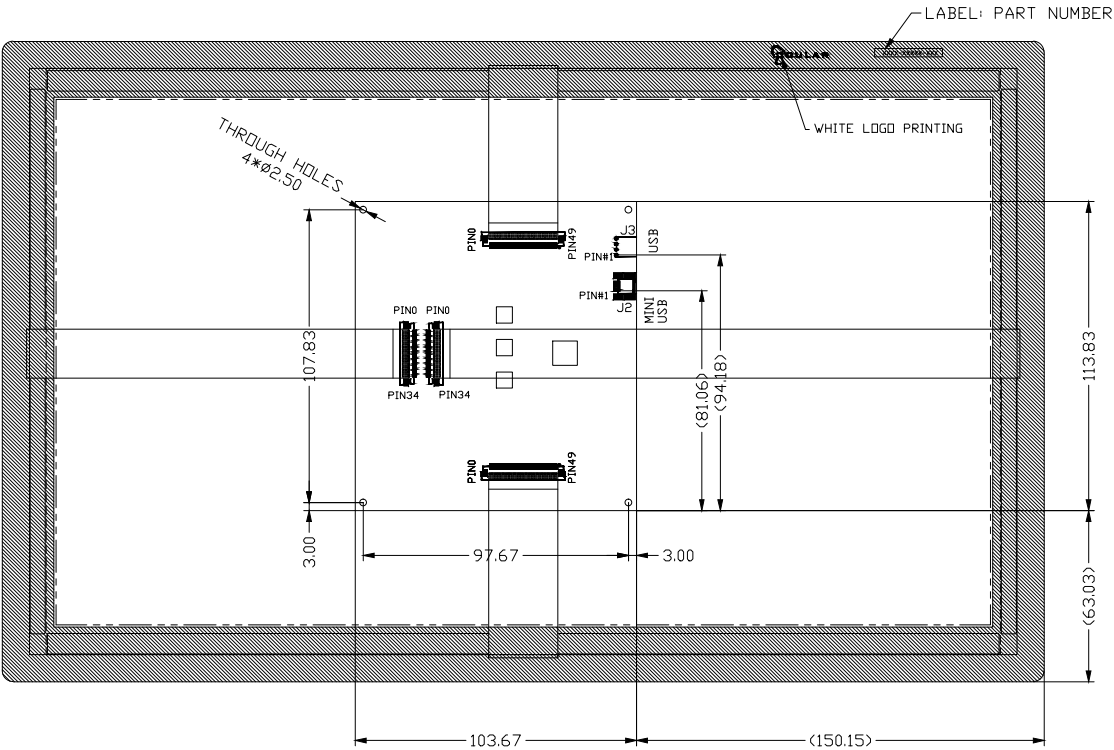

J3(USB) PIN TABLE

PIN#	J3 (USB)
1	5.0V
2	D-
3	D+
4	GND

- NOTES:
- ALL UNITS IS MM.
 - OPERATING TEMPERATURE: -30°C TO 70°C
 - STORAGE TEMPERATURE: -30°C TO 80°C
 - FPC BENDING RADIUS IS R1.0MM MIN
 - USB CONNECTOR IS MOLEX 53015-0410 OR EQUIVALENT
 - ALL ROHS ASSEMBLY
 - FACE PLATE: SODA-LIME GLASS, NO SHARP CORNERS OR EDGES.
 - (*) FOR REFERENCE



THIS DOCUMENT IS CONFIDENTIAL PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF OCULAR CORPORATION.

UNLESS OTHERWISE NOTED :		ENGR MANAGER:		DATE :		
		CHECKED BY:		DATE :		
UNITS	DECIMAL		DWN BY: NEIL		DATE : 2012/03/14	
INCHES [mm]	.XXX[.XX] ±0.008[0.20]		DRAWING TITLE : 15.6" WITH FACE PLATE, mXT1386, USB			
ANGLES	±0.5°		DRAWING No. : F156-01386-099			REV: B
THIRD ANGLE PROJECTION				SCALE 1 : 1		SHEET: 1 OF 1