

D

C

B

A


D

C


B

A

REV :	DESCRIPTION:	BY	DATE
A	RELEASED	NEIL	2012/03/30
B	CANCEL FACE PLATE CHEMISTRY STRENGTHENING	NEIL	2012/07/26

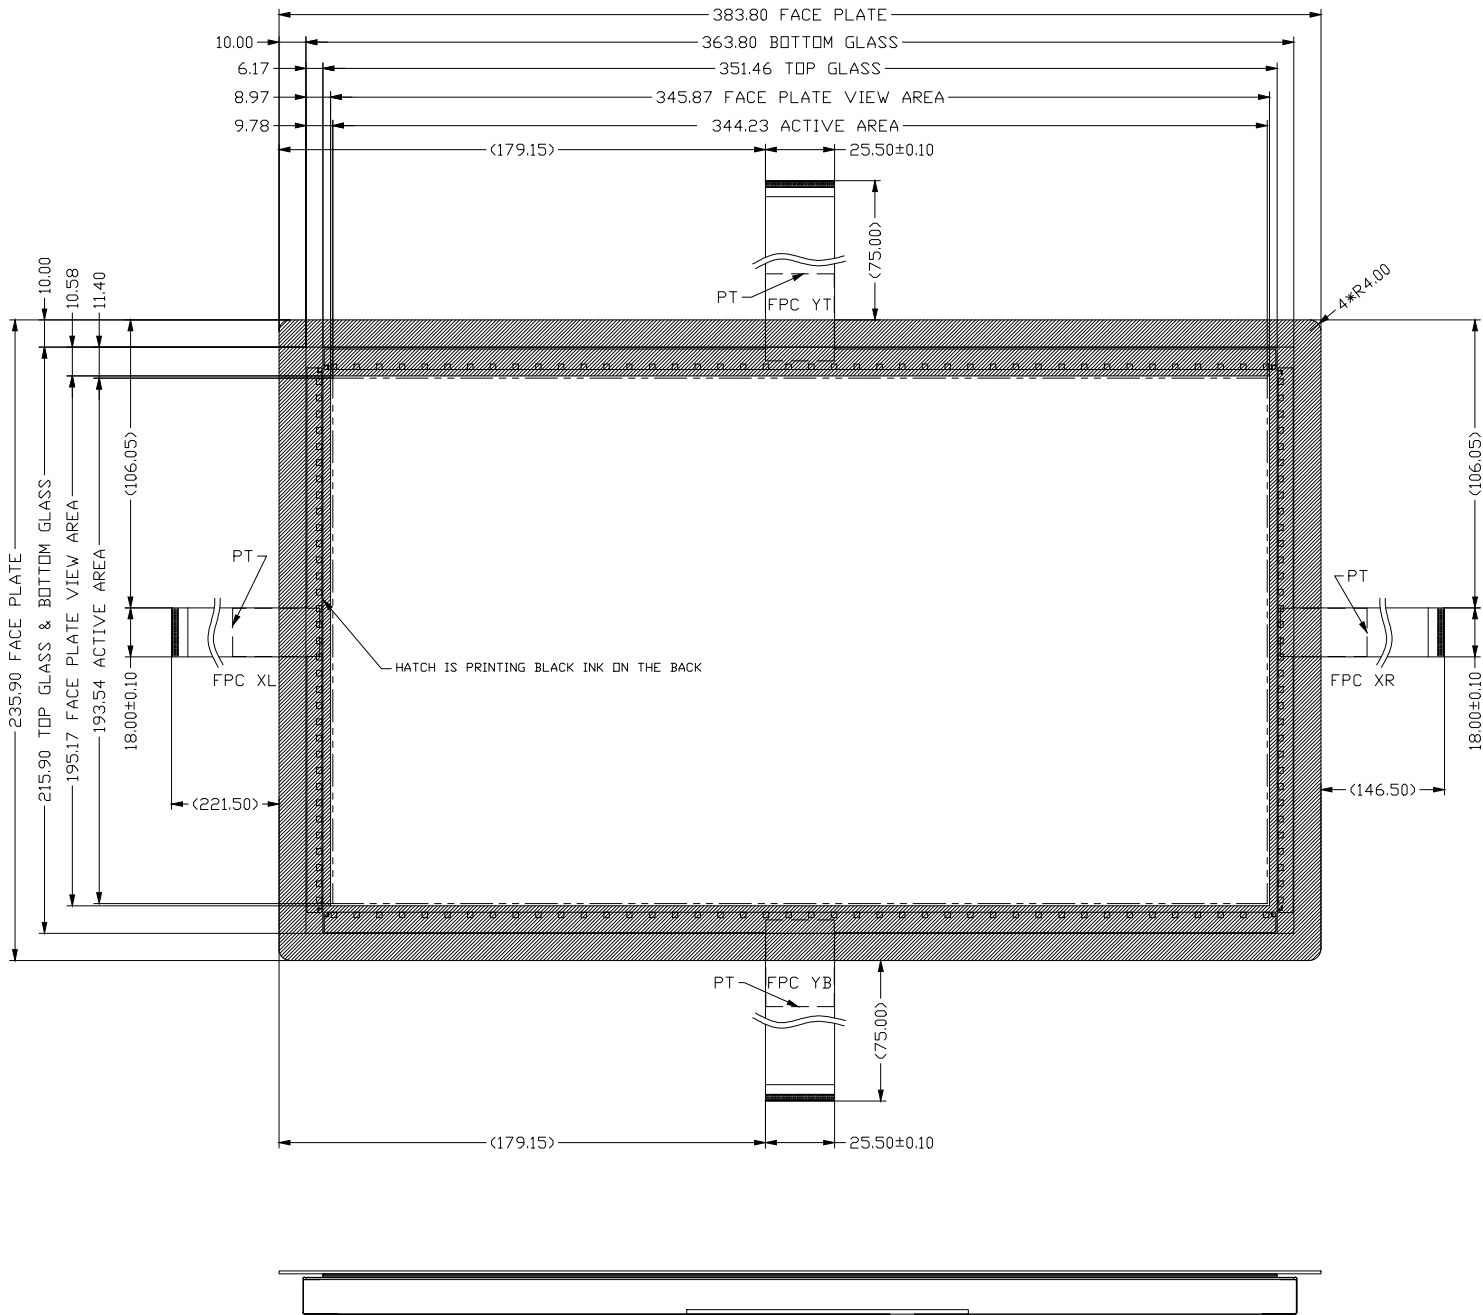

- 3.20±0.50
- 1.10 FACE PLATE
- 0.50 UV GLUE
- 0.70 TOP GLASS (ITO FACE UP)
- 0.20 DCA
- 0.70 BOTTOM GLASS (ITO FACE UP)

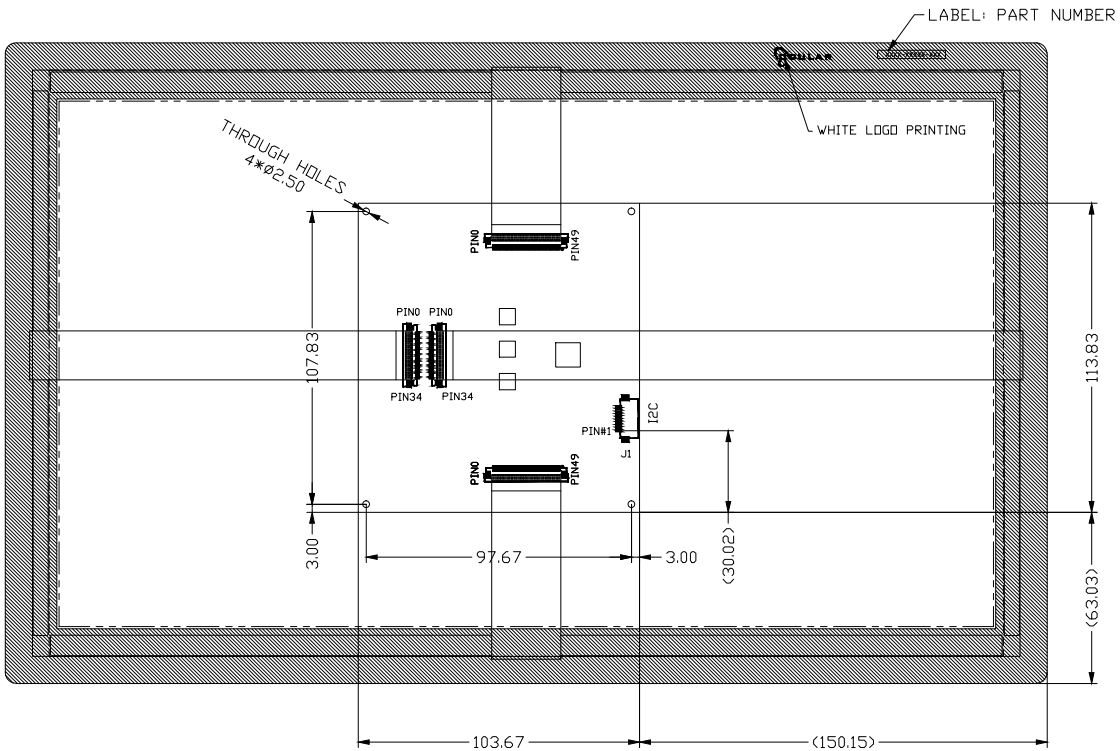

J1(I2C) PIN TABLE

PIN#	J1 (I2C)
1	SCL
2	SDA
3	/RESET
4	/CHG
5	NC
6	GND
7	VDD(3.3V)
8	NC
9	NC
10	NC

- NOTES:
- ALL UNITS IS MM.
 - OPERATING TEMPERATURE: -30°C TO 70°C
 - STORAGE TEMPERATURE: -30°C TO 80°C
 - FPC BENDING RADIUS IS R1.0MM MIN
 - I2C CONNECTOR IS MOLEX 52207-1060 OR EQUIVALENT
 - ALL ROHS ASSEMBLY
 - FACE PLATE: SODA-LIME GLASS, NO SHARP CORNERS OR EDGES.
 - (*) FOR REFERENCE

 THIS DOCUMENT IS CONFIDENTIAL PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF OCULAR CORPORATION.	UNLESS OTHERWISE NOTED :		ENGR MANAGER:		DATE :	
	UNITS	DECIMAL	CHECKED BY:		DATE :	
	INCHES [mm]	.XXX[.XX] ±0.008[0.20]	DWN BY: NEIL		DATE : 2012/03/30	
	ANGLES	±0.5°	DRAWING TITLE : 15.6" WITH FACE PLATE, mXT1386, I2C			
	THIRD ANGLE PROJECTION 		DRAWING No. : F156-01386-199			REV: B
			SCALE 1 : 1		SHEET: 1 OF 1	